

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
10 July 2003 (10.07.2003)

PCT

(10) International Publication Number  
**WO 03/055645 A1**(51) International Patent Classification<sup>7</sup>: **B24C 9/00**

(21) International Application Number: PCT/SG02/00296

(22) International Filing Date:  
27 December 2002 (27.12.2002)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:  
200108107-4 28 December 2001 (28.12.2001) SG(71) Applicant (for all designated States except US): **JETSIS INTERNATIONAL PTE LTD** [SG/SG]; 17 Hwa Yew Industrial Building, Mandai Estate, #06-1B, Singapore 729934 (SG).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

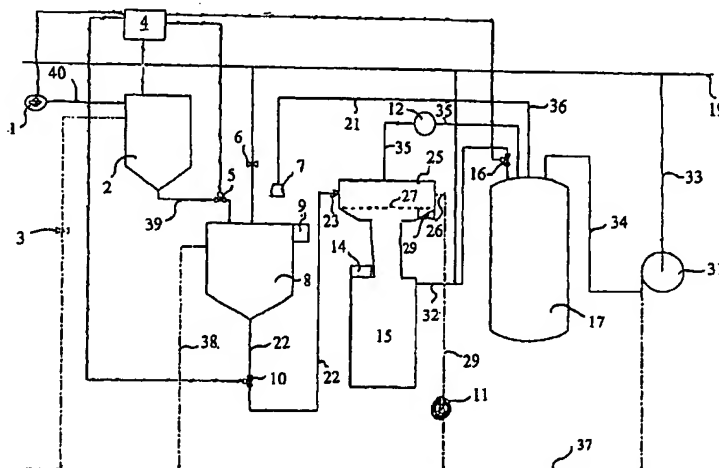(74) Agent: **DREW & NAPIER LLC**; 20 Raffles Place, #17-00, Ocean Towers, Singapore 048620 (SG).(54) Title: **METHOD AND APPARATUS FOR ABRASIVE RECYCLING AND WASTE SEPARATION SYSTEM**

(57) **Abstract:** The present invention provides a method of handling abrasive solids materials used in an abrasive cutting procedure which jets a high-pressure abrasive slurry through a nozzle (7) onto a work piece over and/or in a catcher tank (8). This handling method includes catching the used abrasive slurry together with work piece kerf material in the catcher tank, and passing at least some abrasive solids collected in the catcher tank as a slurry to a partitioning apparatus which includes a vibratory sieve (27). The handling method also includes partitioning the slurry with the partitioning apparatus in order to provide at least two solids streams. One of the solid streams passes through the sieve and the other passes across the sieve whilst entrained as a slurry. The handling method further includes passing as a slurry to the nozzle (7) for jetting a pressurised or pressurisable slurry that has partitioned solids stream which has passed through the sieve (27).

## METHOD AND APPARATUS FOR ABRASIVE RECYCLING AND WASTE SEPARATION SYSTEM

The present invention relates to materials handling and more particularly to any one or more of a method of partitioning solids of a slurry three ways, partitioning apparatus useful therefor, a method of handling abrasive solids materials so as to provide for at least a partial recycle of part thereof, a related abrasive slurry cutting plant and abrasive material prepared by such procedures for subsequent use.

In a jet cutting procedure a water jet customarily employs abrasive solids of a desirable size range, density, hardness and abrasiveness to enhance the erosion effect of the jet on a wide variety of work pieces that normally are interposed between the nozzle from which the jet issues and a catcher tank. Examples of the abrasive type materials used are aluminium oxide, garnet, copper slag, etc.

Examples of materials handling insofar as the abrasive components of plant and procedures in water jet systems include those disclosed in the 2000 publication of BHR Group entitled "Jetting Technology" pages 389 to 399.

It can be seen that such prior art systems have attempted to re-employ some of the abrasive caught by the catcher tank along with kerf from the work piece whilst rejecting solids of an undesirably small particle size. For this purpose one prior art procedure has employed both a hydro-cyclone and a sieve. Such hydro-cyclones are prone to wear with a result in significant maintenance costs which detracts from the cost saving recycle. Such wear in addition reduces performance and requires the use of large quantities of water.

Another system disclosed uses sieve screens (see [www.easijet.com](http://www.easijet.com)).

The present invention is directed to methods and apparatus having application in a partial recycle of abrasive materials used in a water jet cutting system which relies on a flow through over a sieve to achieve a partition of particles in the flow through or on the sieve not to be used through the nozzle from those that are to be so used. Such a procedure can remove oversized particles that might have a tendency to block the jetting nozzle and at the same time can ensure there is little use in the recycle of abrasive material or kerf material of too small a size to be useful.

The system also optionally lends itself to a makeup of abrasive materials in use throughout the overall system that does not undermine the value of the recycle procedure.

The handling system useful in such a jet cutting plant will have application elsewhere wherever a partitioning of solids entrained in a slurry at least two (and preferably three)

-2-

ways is required. Therefore the partitioning apparatus and partitioning method of the present invention has wider applicability, eg; with any other liquid entrainment system.

It is an object of the present invention to provide apparatus and methods which meet at least some of the abovementioned criteria.

In a first aspect the present invention consists in a **method of handling abrasive solids materials** used in an abrasive cutting procedure of a kind which, in use, jets a high pressure abrasive slurry through a nozzle onto a work piece over and/or in a catcher tank, the handling method comprising or including

catching the used abrasive slurry together with work piece kerf material in said catcher tank,

passing at least some of abrasive solids collected in the catcher tank as a slurry to a partitioning apparatus that includes a vibratory sieve,

partitioning with said partitioning apparatus the slurry to provide at least two solids streams one of which passes through the sieve and one of which passes across the sieve whilst still entrained as a slurry, and

passing as a slurry to the nozzle for jetting a pressurised or pressurisable slurry which includes partitioned solids stream that has passed through the sieve.

As used herein "slurry" refers to any liquid vehicle (whatever pressure) associated with solids e.g. such that when moving the liquid entrains the solids.

Preferably there is a partitioning of the solids by the partitioning apparatus three ways, the aforementioned two solids streams and oversized solids that drop from the slurry that passes across the sieve and are at least initially retained on the sieve.

Preferably the solids passed to the nozzle are in the size range of from 10% to 70% of nozzle diameter.

Preferably the passing as a slurry to the nozzle involves high pressure water expression from a pressure vessel.

Preferably said partitioning apparatus comprises or includes a housing having

a first inlet,

a first outlet, and

a collection zone or second outlet, and

-3-

a sieve disposed below said first inlet and said first outlet but above said collection zone or second outlet,

and wherein said first inlet is to receive and pass the slurry at a rate and velocity into the housing above the sieve such that at least some of the liquid component(s) of the slurry will, as a flow through, entrain small and/or less dense solids out through said first outlet,

and wherein the rate and velocity of intake into the housing via the first inlet above the sieve and the outflow via the first outlet is such as to enable at least some oversize solids to settle on the sieve (where they are of an appropriate density) and solids (not entrained out of said first outlet) of sufficient density and of a size less than that of the oversized material to pass down through the sieve.

Preferably said sieve is a directly or indirectly shaken and/or vibratory sieve.

Preferably said partitioning apparatus has a collection zone and there is a valved flow path therefrom to a pressure vessel from which, as required at the nozzle, high pressure water can express the solids stream to pass to the nozzle.

Preferably there is controllable liquid and/or slurry flow path from said pressure vessel back to said collection zone of the partitioning apparatus capable of moving as a slurry more solids from said collection zone through, via the valved flow path, to said pressure vessel.

Preferably there is included the step of providing a makeup feed of abrasive solids.

Preferably said makeup solids are introduced into said catcher tank.

Preferably there is provided a solids agitation water feed into the catcher tank.

Preferably there is an overflow out take of at least water from the catcher tank.

Preferably a control system reliant on at least one sensor provides a control of valves and pumps which determines the modes of operation of the system capable of performing the method.

In a second aspect the present invention consists in **abrasive slurry cutting plant** comprising or including an abrasive supply system,

a catcher tank,

a nozzle for jetting as a slurry abrasive solids onto any appropriately positioned work piece over and/or in the catcher tank,

partitioning apparatus,

1,

-4-

apparatus on demand to provide a supply of high pressure water into said pressure vessel with an ability to express water and/or a slurry therefrom,

apparatus to convey as a slurry caught solids from the catcher tank to said partitioning apparatus,

apparatus to convey a useable abrasive solids stream as a slurry from the partitioning apparatus on demand to the pressurisable vessel,

(optionally) apparatus on demand to provide a water feed to the catcher tank,

(optionally) apparatus to provide, as part of the apparatus to convey a usable abrasive solids stream, a feed of water for the solids stream to pass from the partitioning apparatus to the pressure vessel,

Preferably there is provided apparatus to provide a makeup feed of abrasive solids.

Preferably said makeup feed is a feed into said catcher tank.

Preferably the partitioning apparatus comprises or includes

a housing having

a first inlet,

a first outlet, and

a collection zone or second outlet, and

a sieve disposed below said first inlet and said first outlet but above said collection zone or second outlet,

**wherein** said first inlet is to receive and pass a slurry received from the catcher tank at a rate and velocity into the housing above the sieve such that at least some of the liquid component(s) of the slurry will, as a flow through, entrain a first part of the solids out through said first outlet,

**and wherein** the rate and velocity of intake of the slurry into the housing via the first inlet above the sieve and the outflow via the first outlet is such as to enable at least some oversize material to settle on the sieve and at least some sieve passable solids of greater density than the entrained solids of the flow through to pass down through the sieve.

Preferably there is a said collection zone which is a reservoir from which the collected solids as a slurry on demand (optionally with the addition of additional water) can be fed as a slurry to said pressure vessel from whence the solids may be expressed to the nozzle under the action of high pressure water passing into such pressure vessel.

- - - ratus is included whereby said sieve, in use, vibrates and/or shakes.

-5-

In still a further aspect the present invention consists in **partitioning apparatus** capable of partitioning the solids of a slurry at least three ways, said apparatus comprising or including

a housing having

a first inlet,

a first outlet, and

a collection zone or second outlet, and

a sieve disposed below said first inlet and said first outlet but above said collection zone or second outlet,

**wherein** said first inlet is to receive and pass a slurry received from the catcher tank at a rate and velocity into the housing above the sieve such that at least some of the liquid component(s) of the slurry will, as a flow through, entrain a first part of the solids out through said first outlet,

**and wherein** the rate and velocity of intake of the slurry into the housing via the first inlet above the sieve and the outflow via the first outlet is such as to enable at least some oversize material to settle on the sieve and at least some sieve passable solids of greater density than the entrained solids of the flow through to pass down through the sieve.

Preferably there is provided a drive whereby said sieve, in use, is capable of being actively shaken and/or vibrated and, in use, oversize material that settles on the sieve may migrate therefrom to an optional trap for such material.

Preferably said collection zone is a reservoir adapted so that collected solids as a slurry on demand (optionally with the addition of additional water) can be fed as a slurry to a pressure vessel.

In yet a further aspect the present invention consists in a **method of partitioning solids of a slurry three ways**, said method comprising

providing a housing having an inlet, a first outlet, and a second outlet or collection zone, and, disposed therein, a sieve disposed below said first inlet and said first outlet but above said second outlet or collection zone,

passing a slurry via said inlet into the housing across the sieve and, in part, out of said first outlet whilst at least some of the solids of the slurry fall onto and/or through the sieve,

-6-

harvesting or using the solids that have passed through said sieve and out of said second outlet or into said collection zone,

harvesting or removing those solids collected on the sieve, and

harvesting or disposing of those solids that have passed out of said first outlet.

Preferably the harvesting or using of the solids that pass out of said second outlet or into said collection zone is as a slurry.

Preferably the harvesting or disposal of the solids that pass out of said first outlet is as a slurry.

Preferably the harvesting or using of the solids that pass through the sieve is by a slurry feed thereof from said collection zone or from said second outlet into a pressure vessel from whence the solids may be expressed under the action of water addition into such pressure vessel.

In still a further aspect the present invention consists in **abrasive materials in a water slurry** for use in a jet cutting procedure prepared for such use using an at least partial recycle procedure reliant on a method of the present invention.

A preferred form of the present invention will now be described with reference to the accompanying drawings in which,

**Figure 1** is a diagrammatic view showing a slurry jet issuing nozzle over a catcher tank from whence a fluid tight flow path exists to an inlet into partitioning apparatus having disposed within a housing thereof a sieve over a collection zone and under an outlet for flow through of part of the slurry above the sieve,

**Figure 2** is a diagrammatic view of a whole abrasive jet cutting plant employing the arrangement substantially as disclosed in **Figure 1** showing appropriate controls, and

**Figure 3** shows a preferred housing with sieve of a partitioning plant in cutaway perspective.

In the preferred form of the present invention a nozzle 7 is adapted to receive a slurry containing abrasive materials (preferably in a size range of from about 10% to about 70% of the nozzle diameter via a flow path 21 from a pressure vessel 17. The abrasive slurry from the nozzle 7 is jetted downwardly over the catcher tank 8.

The catcher tank 8 includes an isolation valve 9 capable of isolating the tank from the drain via flow path 38. There is a flow path 22 to an inlet 23 of the partitioning apparatus

-7-

such as preferably disclosed in Figures 1 and 3. This flow path 22 includes a further catcher tank isolation valve 10.

The partitioning apparatus comprises a hopper 25 having an inlet 23 and an outlet 26 both above a sieve screen 27 capable of being shaken or vibrated actively above an outlet (the second outlet) 28 which leads to a collection zone 15.

The first outlet 26 forms part of a flow path 29 via a valve 29 to a drain or catchment.

The collection zone 15 includes a flow path therefrom 32 to the pressure vessel 17. That flow patch 32 is preferably valved by valve 16.

A low pressure water supply (for example 6 to 9 bar) 19 passes via a flow path 33, a pump 31, and a flow path 34 into the pressure vessel 17. As a consequence of use of pump 31 a high pressure water feed (for example, of from 690 to 1000 bar) which is sufficient pressure (when the valve 16 is closed and suction pump 12 is not operating on the flow path 35 back to the partitioning apparatus) to express an abrasive material laden slurry from tank 17 via the flow path 36 through the nozzle 7 as a jet.

The water supply 19 is capable of being introduced at valve 16 (eg; an electrical solenoid valve) into the flow path 32 as shown in Figure 2.

A water and/or slurry return from pressure vessel 17 under the action of a vacuum pump 12 on flow path 35 into the catcher assists in providing the water requirements for a slurry best able to flow along the flow path 32 to the pressure vessel 17.

A air pressurising fan or pump 1 on a flow path 40 into make up tank 2 can force, when valve 5 allows and valve 3 is closed, make up abrasive into the catcher tank 8 via flow path 39 and, when valve 5 is closed and valve 3 is open, to the drain 37.

A drain is depicted generally as 37 and to this can be allowed to flow part of the water feed from the pump 31, the outflow of the undersize less dense materials from the partitioning apparatus (eg; under action of vacuum pump 30) and any water and light material outflow from the catcher tank 8 (via the flow path 38). In addition, if desired a make up abrasive material tank 2 can itself have an operable a feeder valve 5 to the catcher tank 8 where it blends make up feeds of abrasive with used abrasive (and kerf material from any work piece interposed between the slurry and the jet issuing nozzle 7).

A control panel 4 is electrically connected to at least valve 5, (optionally) valve 6, valve 10, valve 16, (optionally) vacuum pump 30, (optionally) pump 31, (optionally) pump 12 (optionally) air supply fan 1.



-8-

In operation the slurry passes thru nozzle 7 and cuts workpiece. The spent abrasive and workpiece waste falls into catch tank 8 below. The slurry pump 11 sucks the slurry from the catch tank 8 thru the sieve shaker 13. The small light particles of product waste and non-recyclable abrasive follows the flow out of the sieve shaker 13 to the slurry pump 11 and off to waste containment. The heavier and larger (recyclable) abrasive particles drop onto the sieve screen in the shaker. Any large scrap particles too big to pass thru the screen remains on top for collection, the remaining particles pass thru the screen and fill the hopper below. An abrasive height measurement device 14 inside the hopper sends a signal to the new abrasive feed valve 5 to add new abrasive into the catch tank when the level in the hopper 15 falls below a certain point. The new abrasive feed valve is fed with abrasive from the abrasive hopper 2 under pressure of air and feeds abrasive into the mix to replace the volume of abrasive that has passed straight thru the sieve shaker 13 to the slurry pump 11 and waste due to it being too fine to be recycled. This new abrasive mixes with the used slurry in the catch tank 15 and also passes together with it thru the sieve shaker removing any oversized abrasive.

When the pressure vessel 17 needs to refill itself another suction pump 12 sucks water from the vessel and creates a vacuum which then draws abrasive laden slurry from the hopper 15 into the vessel 17. The heavy abrasive settles into and fills the vessel whilst the rest of the water passes thru the slurry pump 12 and is pumped back into the sieve shaker.

A preferred form will now be described with reference to the Figure 3.

Figure 3 shows in cross section the inlet 23 being a 15 mm diameter inlet and the outlet 26 as a 15 mm diameter outlet both positioned about 100 mm above the sieve 27 which in one form of the present invention is a 150 US mesh standard sieve adapted to allow through particles below 0.15 mm in size with such a sieve and such inlet/outlet configuration preferably distance across the housing 25 between the first inlet or inlet 23 and the first outlet 26 is approximately 250 mm.

We have determined that where a slurry having abrasive materials and kerf therein with a solids content of 0.3 kg/min at a flow rate of 2 litres/min is introduced by the inlet 23 there is, in steady state conditions, an outflow of about 2 litres/min via the outlet 26 with the outcome that most of the oversized materials, (ie; above 0.15 mm in particle size) are collected on the screen 27 carried under a removable assembly 28

-9-

(the removal of preferably also removes an optional trap 29 to which above 0.15mm particles migrate under the effect of flow and vibration) and most of the other particles sizes (ie; below 0.025 mm particle size) exit via the outlet 26 whilst the remainder settles into the collection zone 15 from whence it can be reused.

That proportion of material wrongly passing through to the outlet 26, (ie; is material that should have reached collection zone 15) is not greater than about 5% w/w and that material that should have passed out of the outlet 26 (ie; undesirable lighter or smaller abrasive particles) but which is collected in collection zone 15 is no more than about 5% w/w.

It has been found that the three way partitioning can be achieved by the methods and apparatus of the present invention for various slurries and various rates of flow thereof by appropriate tuning to geometry (e.g. inlet with respect to screen and outlet) and screen size.

It is appropriate to ensure with geometry of the apparatus and flow rates that the slurry transit times in flow through from inlet 23 to outlet 26 is such that it is higher than the settling out time of those small particles to be excluded from the collection zone.

With the arrangement of Figure 3 oversized materials collecting on the screen will naturally migrate to a catchment area at the end of the sieve and can be periodically removed (eg; with screen removal and replacement) or preferably can be collected in a trap peripherally of the screen (ie; they migrate under the shaking of the screen [e.g. by some eccentric mass (not shown) acting on the member 30] and/or with effect of the flow through) from whence they can be removed. To enhance this effect the sieve or screen 27 can slope slightly to trap 29 and the sieve carrying assembly 28 can be resiliently mounted relative to member 30 reliant on rubber bushes 31.

**WHAT IS CLAIMED IS:**

1. A method of handling abrasive solids materials used in an abrasive slurry cutting procedure of a kind which, in use, jets a high pressure abrasive slurry through a nozzle onto a work piece over and/or in a catcher tank, the handling method comprising or including catching the used abrasive slurry together with work piece kerf material in said catcher tank,

passing at least some of abrasive solids collected in the catcher tank as a slurry to a partitioning apparatus that includes a vibratory sieve,

partitioning with said partitioning apparatus the slurry to provide at least two solids streams one of which passes through the sieve and one of which passes across the sieve whilst still entrained as a slurry, and

passing as a slurry to the nozzle for jetting a pressurised or pressurisable slurry which includes partitioned solids stream that has passed through the sieve.

2. A method of claim 1 wherein there is a partitioning of the solids by the partitioning apparatus three ways, the aforementioned two solids streams and oversized solids that drop from the slurry that passes across the sieve and are at least initially retained on the sieve.

3. A method of claim 2 wherein the solids passed to the nozzle are in the size range of from about 10% to about 70% of the nozzle diameter.

4. A method of any one of the preceding claims wherein the passing as a slurry to the nozzle involves high pressure water expression from a pressure vessel.

5. A method of any one of the preceding claims wherein said partitioning apparatus comprises or includes

a housing having

a first inlet,

a first outlet, and

a collection zone or second outlet, and

a sieve disposed below said first inlet and said first outlet but above said collection zone or second outlet,

and wherein said first inlet is to receive and pass the slurry at a rate and velocity into the housing above the sieve such that at least some of the liquid component(s) of the slurry will, as a flow through, entrain small and/or less dense solids out through said first outlet,

-11-

and wherein the rate and velocity of intake into the housing via the first inlet above the sieve and the outflow via the first outlet is such as to enable at least some oversize solids to settle on the sieve (where they are of an appropriate density) and solids (not entrained out of said first outlet) of sufficient density and of a size less than that of the oversized material to pass down through the sieve.

6. A method of claim 5 wherein said sieve is a directly or indirectly shaken and/or vibratory sieve.
7. A method as claimed in any one of the preceding claims wherein said partitioning apparatus has a collection zone and there is a valved flow path therefrom to a pressure vessel from which, as required at the nozzle, high pressure water can express the solids stream to pass to the nozzle.
8. A method as claimed in claim 7 wherein there is controllable liquid and/or slurry flow path from said pressure vessel back to said collection zone of the partitioning apparatus capable of moving as a slurry more solids from said collection zone through, via the valved flow path, to said pressure vessel.
9. A method of any one of the preceding claims wherein there is included the step of providing a makeup feed of abrasive solids.
10. A method of claim 9 wherein said makeup solids are introduced into said catcher tank.
11. A method of any one of the preceding claims wherein there is provided a solids agitation water feed into the catcher tank.
12. A method of any one of the preceding claims wherein there is an overflow out take of at least water from the catcher tank.
13. A method of any one of the preceding claims wherein a control system reliant on at least one sensor provides a control of valves and pumps which determines the modes of operation of the system capable of performing the method.
14. Abrasive slurry cutting plant comprising or including an abrasive supply system,  
a catcher tank,  
a nozzle for jetting as a slurry abrasive solids onto any appropriately positioned work piece over and/or in the catcher tank,  
partitioning apparatus,  
a pressure vessel,

-12-

apparatus on demand to provide a supply of high pressure water into said pressure vessel with an ability to express water and/or a slurry therefrom,

apparatus to convey as a slurry caught solids from the catcher tank to said partitioning apparatus,

apparatus to convey a useable abrasive solids stream as a slurry from the partitioning apparatus on demand to the pressurisable vessel,

(optionally) apparatus on demand to provide a water feed to the catcher tank,

(optionally) apparatus to provide, as part of the apparatus to convey a usable abrasive solids stream, a feed of water for the solids stream to pass from the partitioning apparatus to the pressure vessel.

15. Plant of claim 14 wherein there is provided apparatus to provide a makeup feed of abrasive solids.

16. Plant of claim 15 wherein said makeup feed is a feed into said catcher tank.

17. Plant of any one of claims 14 to 16 wherein the partitioning apparatus comprises or includes

a housing having

a first inlet,

a first outlet, and

a collection zone or second outlet, and

a sieve disposed below said first inlet and said first outlet but above said collection zone or second outlet,

wherein said first inlet is to receive and pass a slurry received from the catcher tank at a rate and velocity into the housing above the sieve such that at least some of the liquid component(s) of the slurry will, as a flow through, entrain a first part of the solids out through said first outlet,

and wherein the rate and velocity of intake of the slurry into the housing via the first inlet above the sieve and the outflow via the first outlet is such as to enable at least some oversize material to settle on the sieve and at least some sieve passable solids of greater density than the entrained solids of the flow through to pass down through the sieve.

18. Plant of claim 17 wherein there is a said collection zone which is a reservoir from which the collected solids as a slurry on demand (optionally with the addition of additional water) can be fed as a slurry to said pressure vessel from whence the solids may be

expressed to the nozzle under the action of high pressure water passing into such pressure vessel.

19. Plant of claim 17 or 18 wherein apparatus is included whereby said sieve, in use, vibrates and/or shakes and, in use, oversize material that settles on the sieve may migrate therefrom to a trap for such material.

20. **Partitioning apparatus** capable of partitioning the solids of a slurry at least three ways, said apparatus comprising or including

a housing having

a first inlet,

a first outlet, and

a collection zone or second outlet, and

a sieve disposed below said first inlet and said first outlet but above said collection zone or second outlet,

**wherein** said first inlet is to receive and pass a slurry received from the catcher tank at a rate and velocity into the housing above the sieve such that at least some of the liquid component(s) of the slurry will, as a flow through, entrain a first part of the solids out through said first outlet,

**and wherein** the rate and velocity of intake of the slurry into the housing via the first inlet above the sieve and the outflow via the first outlet is such as to enable at least some oversize material to settle on the sieve and at least some sieve passable solids of greater density than the entrained solids of the flow through to pass down through the sieve.

21. Apparatus of claim 20 wherein there is provided a drive whereby said sieve, in use, is capable of being actively shaken and/or vibrated.

22. Apparatus as claimed in claim 20 or 21 wherein said collection zone is a reservoir adapted so that collected solids as a slurry on demand (optionally with the addition of additional water) can be fed as a slurry to a pressure vessel.

23. **A method of partitioning solids of a slurry three ways**, said method comprising providing a housing having an inlet, a first outlet, and a second outlet or collection zone, and, disposed therein, a sieve disposed below said first inlet and said first outlet but above said second outlet or collection zone,

-14-

passing a slurry via said inlet into the housing across the sieve and, in part, out of said first outlet whilst at least some of the solids of the slurry fall onto and/or through the sieve,

harvesting or using the solids that have passed through said sieve and out of said second outlet or into said collection zone,

harvesting or removing those solids collected on the sieve, and

harvesting or disposing of those solids that have passed out of said first outlet.

24. A method as claimed in claim 23 wherein the harvesting or using of the solids that pass out of said second outlet or into said collection zone is as a slurry.

25. A method as claimed in claim 23 or claim 24 wherein the harvesting or disposal of the solids that pass out of said first outlet is as a slurry.

26. A method as claimed in any one of claims 23 to 25 wherein the harvesting or using of the solids that pass through the sieve is by a slurry feed thereof from said collection zone or from said second outlet into a pressure vessel from whence the solids may be expressed under the action of water addition into such pressure vessel.

27. A method of any one of claims 23 to 26 wherein said slurry to be partitioned includes solids for recycle use in an abrasive water jetting system.

28. Abrasive materials in a water slurry for use in a jet cutting procedure prepared for such use using an at least partial recycle procedure reliant on a method of any one of claims 23 to 25.

29. Partitioning apparatus substantially as hereinbefore described with reference to any one or more of the accompanying drawings.

30. A method of partitioning solids substantially as hereinbefore described with reference to any one or more of the accompanying drawings.

31. Abrasive slurry cutting plant having a solids recycle arrangement, said plant or recycle being substantially as hereinbefore described with reference to any one or more of the accompanying drawings.

32. A method of handling abrasive solids materials substantially as hereinbefore described with reference to one or more of the accompanying drawings.

1/3

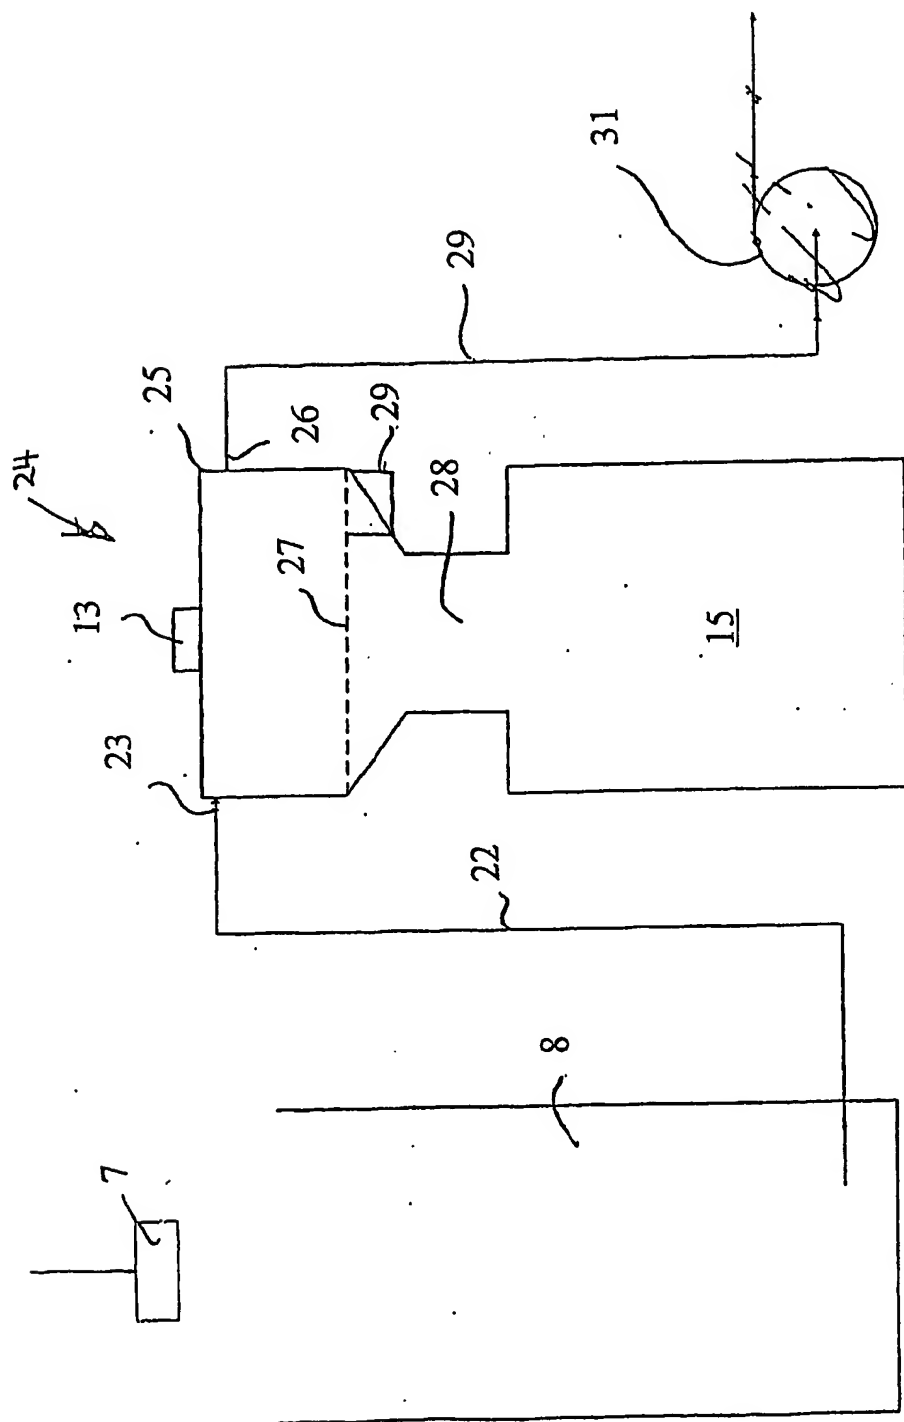


Fig. 1



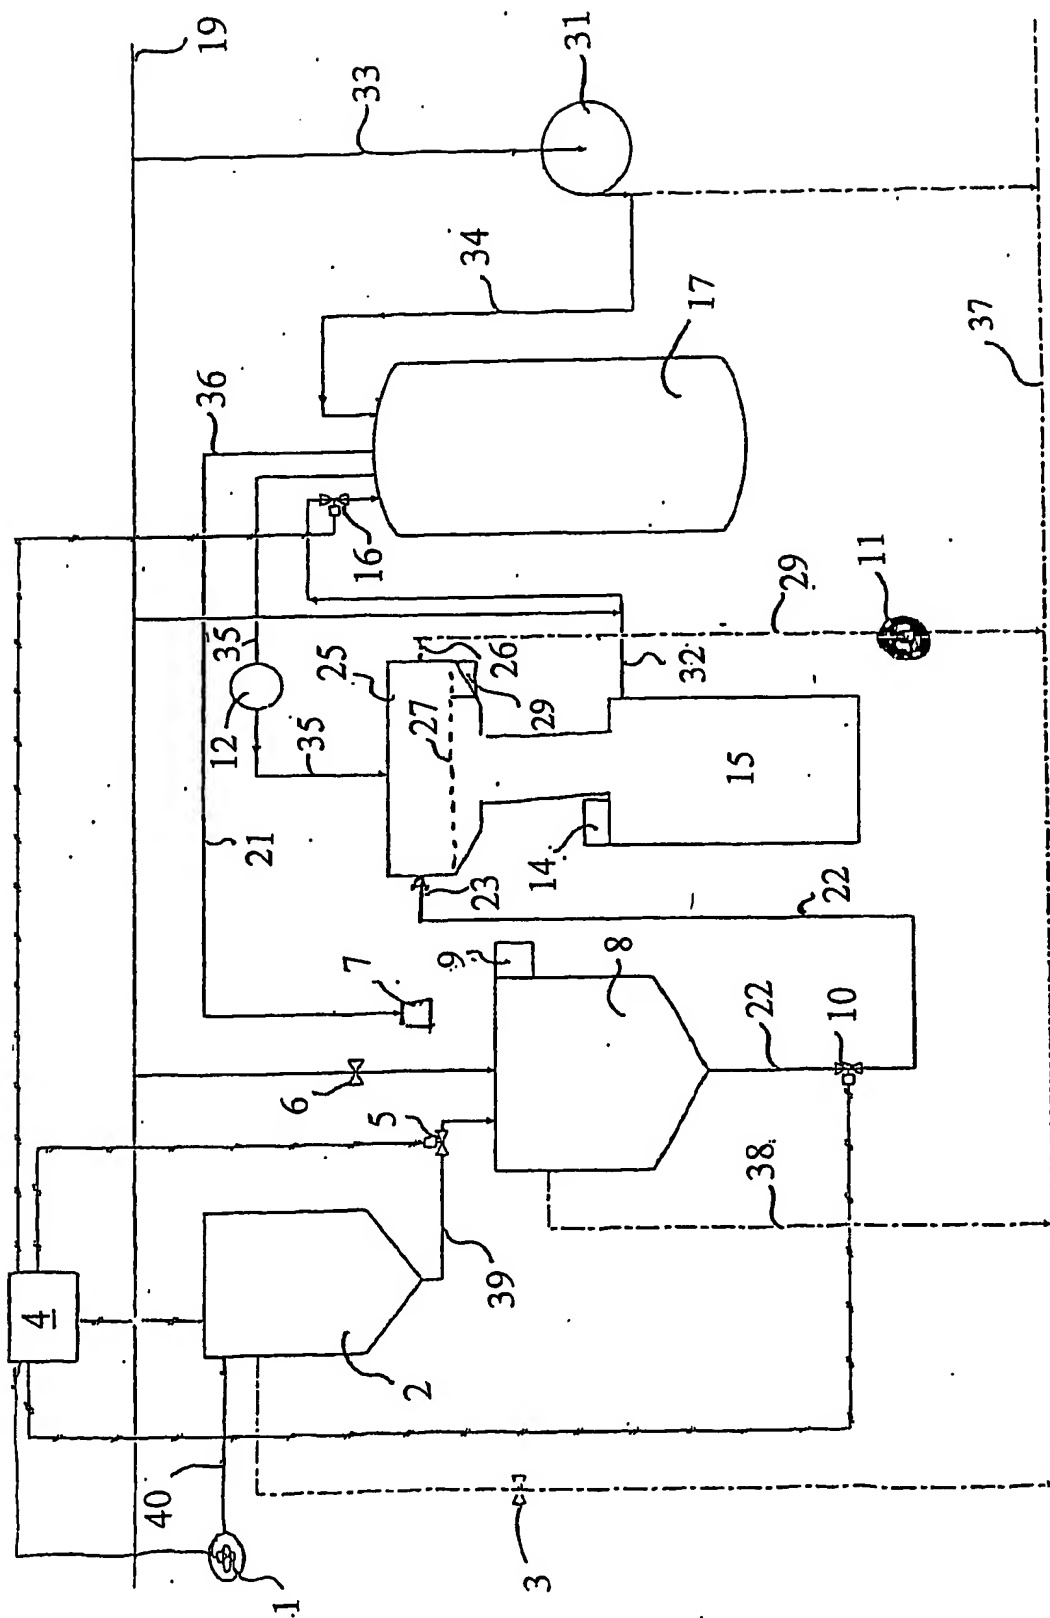


Fig. 2

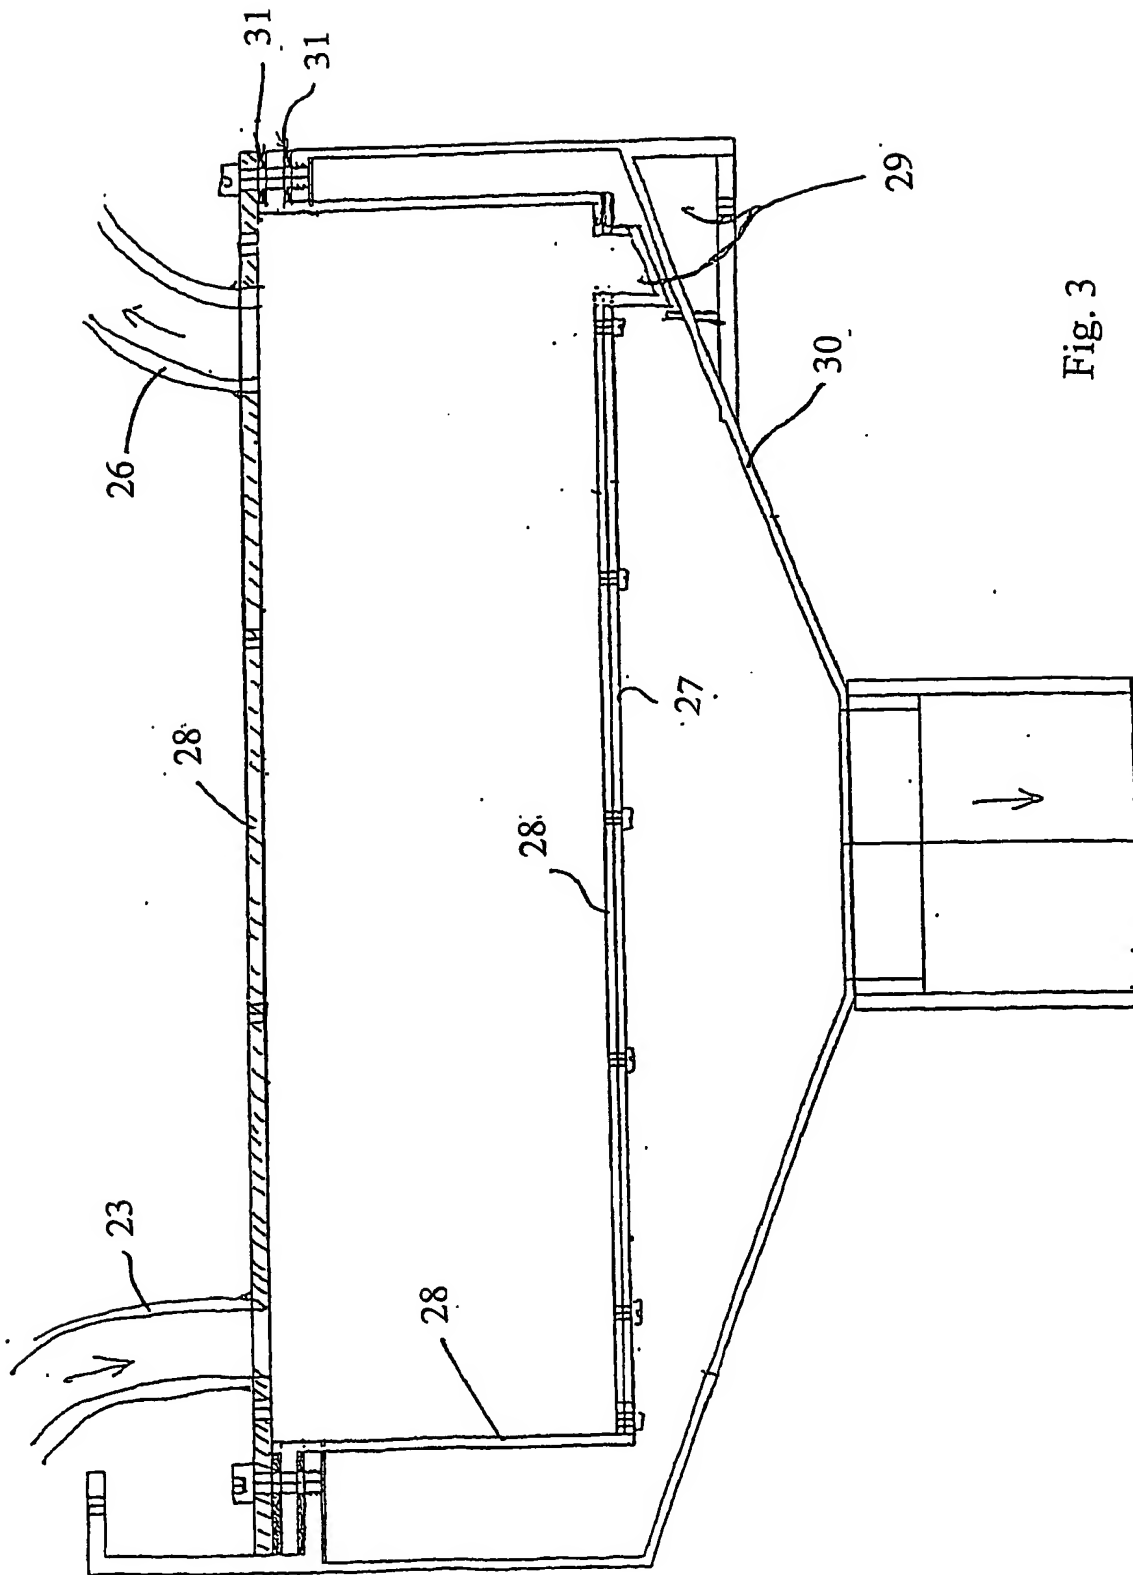


Fig. 3

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/SG 02/00296

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B24C9/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B24C B07B B03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 328 638 B1 (CHIN DANIEL ET AL) 11 December 2001 (2001-12-11)	14-18
A	column 1, line 15 - line 26 column 2, line 11 - line 64 figure 1	1-13
Y	EP 1 034 891 A (TORBO ENGINEERING KEIZERS GMBH) 13 September 2000 (2000-09-13) the whole document	14-18, 26,27
X	GB 1 076 922 A (SIMON LTD HENRY) 26 July 1967 (1967-07-26)	20-25
Y	page 1, right-hand column, line 66 -page 2, right-hand column, line 115 figure 1	26,27
	--- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

5 March 2003

Date of mailing of the international search report

19/03/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Eder, R

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SG 02/00296

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 198 43 683 A (LUTZE HANS ;MORSCHETT PETER (DE)) 30 March 2000 (2000-03-30) column 1, line 4 - line 5 claim 1	28
A	EP 0 622 121 A (WESTINGHOUSE ELECTRIC CORP) 2 November 1994 (1994-11-02) the whole document	1-28

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SG 02/00296

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 29-32  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:  
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 29-32

These claims do not define the matter for which protection is sought in terms of technical features according to Article 6 and Rule 6.3(a) PCT. Since no technical features are defined, a meaningful search cannot be carried out by the international search authority.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SG 02/00296

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6328638	B1	11-12-2001	US 6361416 B1 26-03-2002
			US 6299510 B1 09-10-2001
			AU 6937400 A 19-03-2001
			TW 470689 B 01-01-2002
			WO 0114102 A2 01-03-2001
			AU 3668799 A 16-11-1999
			CA 2328711 A1 04-11-1999
			EP 1073543 A1 07-02-2001
			JP 2002512895 T 08-05-2002
			WO 9955492 A1 04-11-1999
			US 6375547 B1 23-04-2002
			US 2002028634 A1 07-03-2002
EP 1034891	A	13-09-2000	DE 19910563 A1 14-09-2000
			EP 1034891 A2 13-09-2000
GB 1076922	A	26-07-1967	NONE
DE 19843683	A	30-03-2000	DE 19843683 A1 30-03-2000
EP 0622121	A	02-11-1994	US 5372650 A 13-12-1994
			CA 2122194 A1 28-10-1994
			CZ 9401006 A3 16-08-1995
			EP 0622121 A1 02-11-1994

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**